

# BUCKRAM PREMIUM

# TECHNISCHE SPECIFICATIES TECHNICAL SPECIFICATIONS TECHNISCHE DATEN



## BUCKRAM PREMIUM

<b>ketting/warp/Kette</b>	20,5 draden/threads/Fäden per cm 50% katoen/cotton/Baumwolle, Nm 34 50% polyester
<b>inslag/weft/Schuss</b>	18 draden/threads/Fäden per cm 50% katoen/cotton/Baumwolle, Nm 28 50% polyester
<b>gewicht/substance</b>	232 g/m <sup>2</sup>
<b>dikte/caliper/Dicke</b>	ca. 0,30 mm
<b>lengte/roll size/Länge</b>	50 meter
<b>breedte/width/Breite</b>	108 cm 108 cm benutbare breedte/usable width/Nutzbreite



van Heek textiles

Een tijdloos en degelijk product dat door de combinatie van polyester en katoen voldoet aan alle eisen op het gebied van treksterkte en slijtvastheid. Door de pu topcoating heeft Buckram Premium een hoog vuil- en waterafstotend vermogen.

The combination of polyester and cotton results in a classic and durable product that meets all requirements concerning tensile strength and wear-resistance. The pu top coating gives Buckram Premium its high dirt- and water-resistant qualities.

Ein zeitloses und haltbares Produkt, das durch die Kombination von Polyester und Baumwolle alle Anforderungen an Zug- und Verschleißfestigkeit erfüllt. Durch die Oberflächenbeschichtung aus Pu ist Buckram Premium enorm schmutz- und wasserabweisend.




van Heek textiles

L. van Heek Textiles  
P.O. Box 1  
7580 AA Losser-Holland  
Gronausestraat 309  
Telephone +31(0)53 5371111  
Fax +31(0)53 5371140  
info@vanheektextiles.com  
[www.vanheektextiles.com](http://www.vanheektextiles.com)



# BUCKRAM PREMIUM

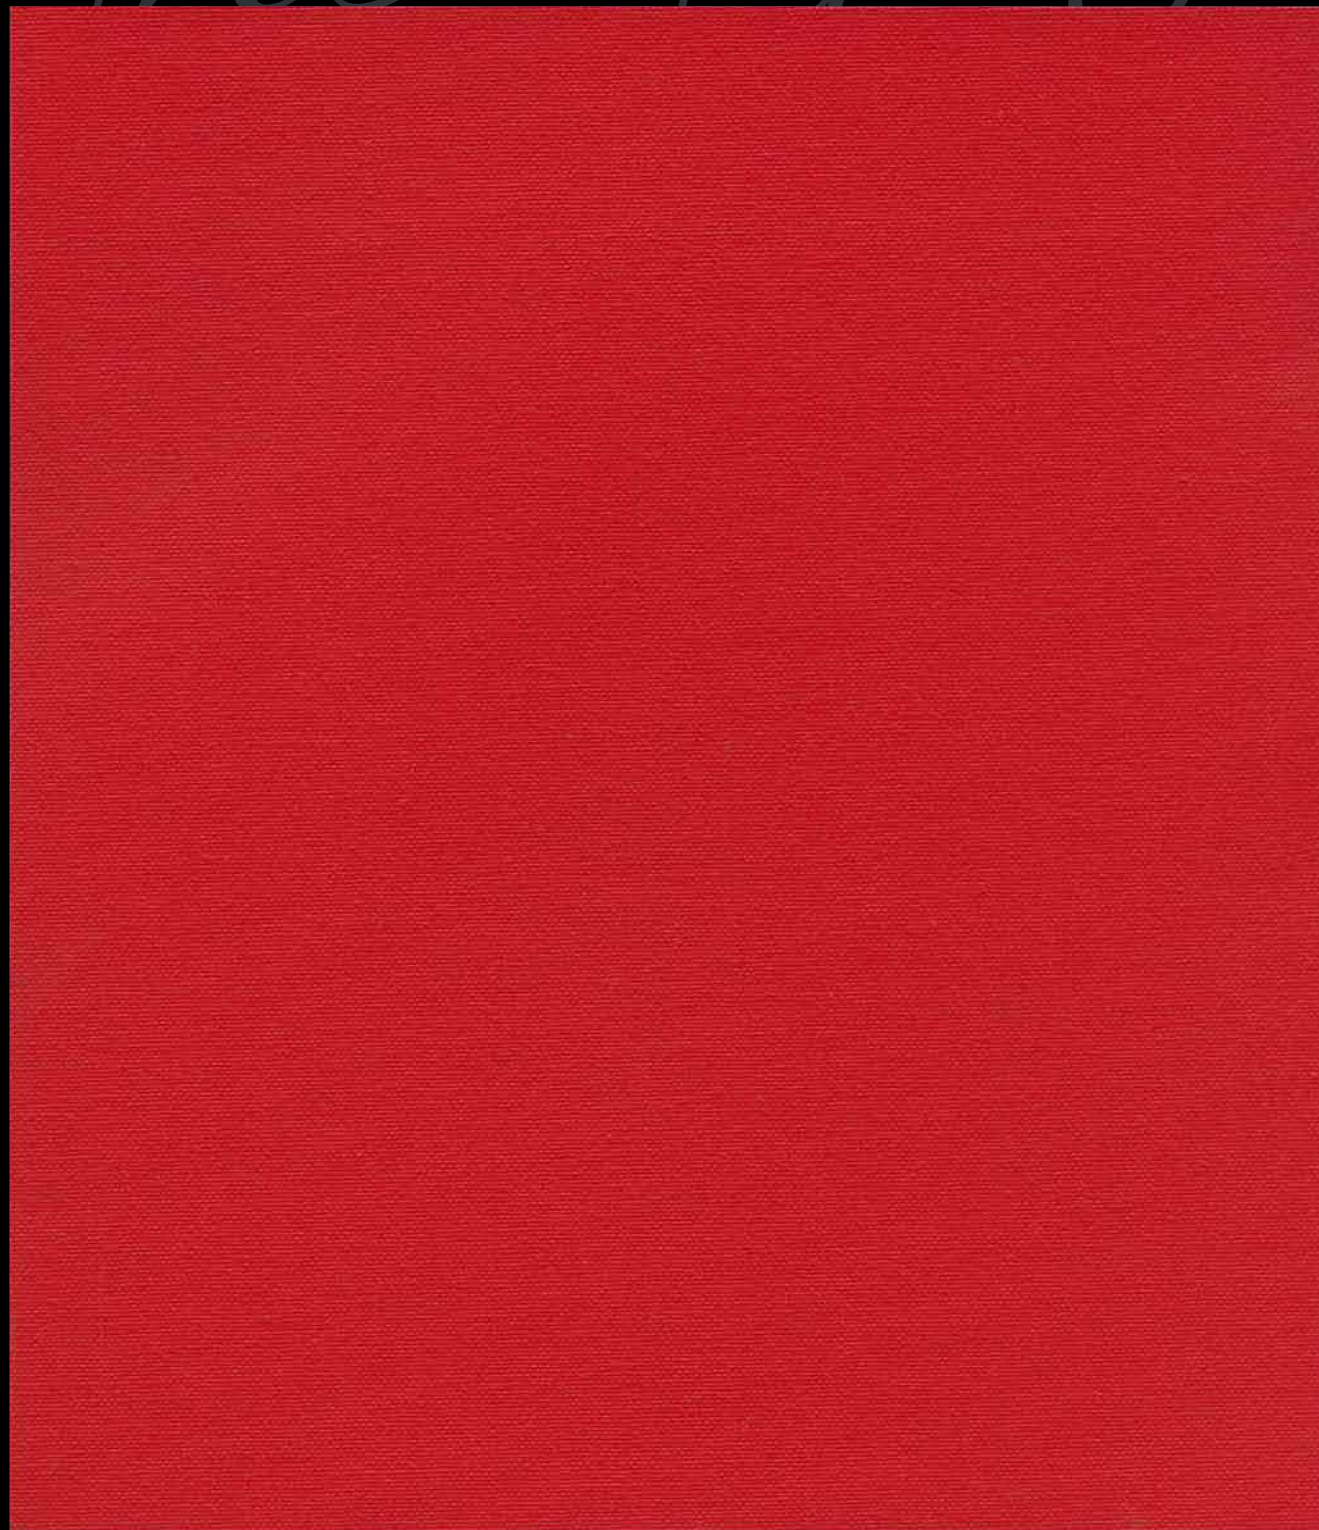

29014 Technische specificaties: zie achterzijde / Technical specifications: see back of card / Technische Daten: siehe Rückseite

# BUCKRAM PREMIUM



29009



29012



29010



29015



29008



29016



29030



29031



29004



29019



29025



29001



29032



29006



29003



29022



29020



29023



29011



29013



29005



29002



29000



29026



29007